

Vertical laminar air flow cabinet, 1200 wide


CONFORMITÀ

EN 61010-1, EN 61326-1, EN 61000-6-3

ADVANTAGES

MA ANCHE...

- Audible and visual alarm in case of airflow defect
- Electronic compartment located outside the contaminated area
- High intensity of light
- White walls for a glare-free brightness
- Smooth walls, rounded corners and no welds ; allowing easy cleaning and decontamination
- Easy replacement of the filters
- Microprocessor control system with digital display for airflow velocity
- Low noise fan

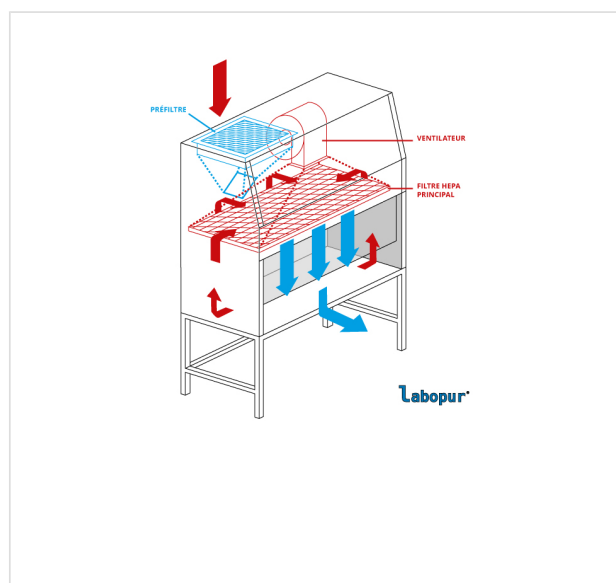

CARATTERISTICHE TECNICHE

Modello	FLV12	Flusso (m3/h)	2150
Conformità	EN 61010-1, EN 61326-1, EN 61000-6-3	Contaore	Inclus
Dimensioni di spedizione HxWxD (mm)	1500 x 1450 x 850	Voltaggio (volt)	0.99999
Flusso d'aria (m/s)	0,4	Potenza elettrica (W)	760
Voltaggio (volt)	220	Codice HS	84146011

PRODUITS COMPLÉMENTAIRES

- Front enclosure with UV light for FLV12 (Réf : FACFLV12)
- Support stand for FLV12 and PSM12 (Réf : TH12)
- Gas valve with solenoid valve (Réf : VANGAZ)
- Vacuum valve (Réf : VANVID)

Modello	Dimensioni esterne HxWxD (mm)	Dimensioni interne HxWxD (mm)	Peso (kg)
FLV12	1345 x 1360x 795	620 x 1195 x 630	185.00

