

DLV52



# Espediente doccia e lavatore d occhi 100% acciai inossidabili

## CONFORMITÀ


EN 15154-1, EN 15154-2, NF X 15-221

## ADVANTAGES

- ISO 3864 compliant
- First-aid in case of chemical projection

## MA ANCHE...

- Anti-dust caps for dusty environment
- Compliant to the article R. 4224-14 of the Labour Code
- Delivered with the first-aid labelling
- Allows to rinse itself the body in case of chemical projection

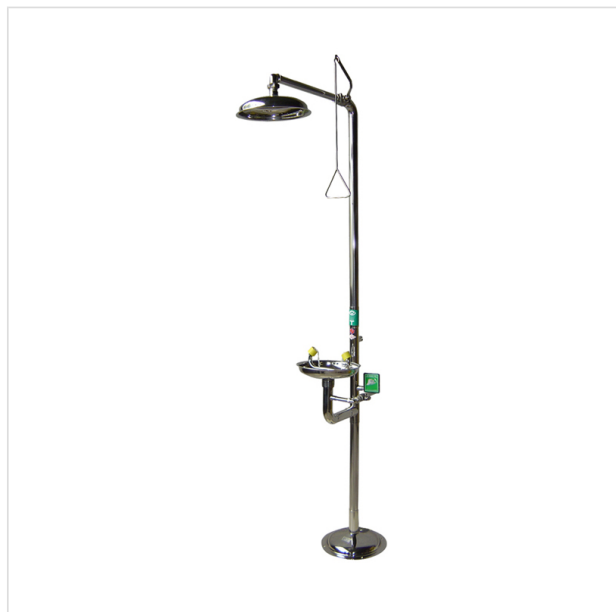

## CARATTERISTICHE TECNICHE

Modello	<b>DLV52</b>	Vaschetta	<b>acciaio inossidabile</b>
Conformità	<b>EN 15154-1, EN 15154-2, NF X 15-221</b>	Soffione doccia	<b>acciaio inossidabile</b>
Dimensioni di spedizione HxWxD (mm)	<b>350 x 260 x 860</b>	Tubatura	<b>acciaio inossidabile</b>
Uso	<b>uso interno</b>	Alimentazione	<b>F1"</b>
Fissaggio	<b>comando manuale e a pedale</b>	Evacuazione	<b>F1 1 / 4"</b>
	<b>fissazione al suolo</b>	Codice HS	<b>73242921</b>

## OPTIONS

- Mitigeur Thermostatic per doccia (Réf : MTD)

Modello	Dimensioni esterne HxWxD (mm)	Dimensioni interne HxWxD (mm)	Flusso di lavaggio oculare (L/min)	Flusso doccia (L/min)	Peso (kg)
DLV52	2200 x 640		11	75	19.00