

DLV52



Espediente doccia e lavatore d occhi 100% acciai inossidabili

CONFORMITÀ


EN 15154-1, EN 15154-2, NF X 15-221

ADVANTAGES

- ISO 3864 compliant
- First-aid in case of chemical projection

MA ANCHE...

- Anti-dust caps for dusty environment
- Compliant to the article R. 4224-14 of the Labour Code
- Delivered with the first-aid labelling
- Allows to rinse itself the body in case of chemical projection

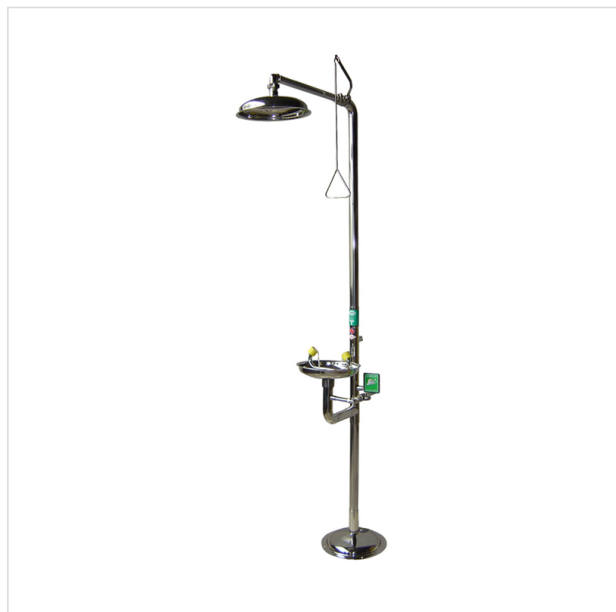

CARATTERISTICHE TECNICHE

Modello	DLV52	Vaschetta	acciaio inossidabile
Conformità	EN 15154-1, EN 15154-2, NF X 15-221	Soffione doccia	acciaio inossidabile
Dimensioni di spedizione HxWxD (mm)	350 x 260 x 860	Tubatura	acciaio inossidabile
Uso	uso interno	Alimentazione	F1"
Fissaggio	comando manuale e a pedale	Evacuazione	F1 1 / 4"
	fissazione al suolo	Codice HS	73242921

OPTIONS

- Mitigeur Thermostatic per doccia (Réf : MTD)

Modello	Dimensioni esterne HxWxD (mm)	Dimensioni interne HxWxD (mm)	Flusso di lavaggio oculare (L/min)	Flusso doccia (L/min)	Peso (kg)
DLV52	2200 x 640		11	75	19.00